



Capatect-Gewebe 650/110

Specially equipped, non-sliding fibre glass reinforcement fabric



Product Description

Field of Application	<p>Reinforcement fabric in Capatect ETICS/EWI Systems A or B for embedding in</p> <ul style="list-style-type: none"> ■ Capatect-Klebe- und Spachtelmasse 190 (adhesive and surfacer) ■ Capatect-Klebe- und Armierungsmasse 186M (adhesive and surfacer) ■ Capatect-Klebe- u. Armierungsmasse 133 LEICHT (adhesive and surfacer) ■ Capatect-ZF-Spachtel 699 (surfacer) ■ Capatect-CS-Klebe- und Armierungsmörtel 850 (adhesive and reinforcement mortar) ■ Capatect-ArmaReno 700 (mineral mortar) ■ Capatect-ArmaReno Sockel ■ CarbonSpachtel ■ CarboNit
Product Properties	<ul style="list-style-type: none"> ■ Non-sliding ■ High tensile strength ■ Unplasticized ■ Alkali-resistant ■ Mesh size 4 x 4 mm ■ Edges are cut
Packaging/Package Size	<p>Fabric 650/110: 50 m rolls, 1100 mm wide = 55 m² Fabric 650/25: 50 m rolls, 250 mm wide = 12.5 m²</p>
Colours	Orange
Storage	Dry area
Technical Data	<ul style="list-style-type: none"> ■ Dressing: 20 - 30 %, organic ■ Initial tear strength: (in warps and woofs): 1750 N / 5 cm ■ Area-related mass: 165 g/m² ± 5 % to DIN 53854 ■ Loss of tensile strength after storage in alkali: < 50% (28 d NaOH 5% sol. or 24 hours in alkaline sol.)
Supplementary Product	<ul style="list-style-type: none"> ■ Capatect-Diagonalarmierung 651/00 <p>Pre-cut fabric parts for additional diagonal reinforcement on all corners of exterior openings, e.g. windows and doors.</p> <p>Size: approx. 330 x 545 mm Packaging: Carton of 100 units</p> <ul style="list-style-type: none"> ■ Capatect-Sturzeckwinkel 651/20

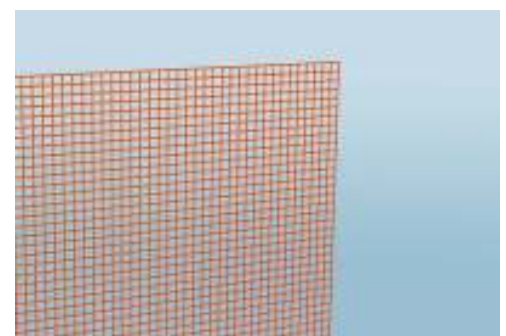

Product No.	<p>Pre-cut fabric parts for additional diagonal reinforcement in combination with inner edge reinforcement for example on window sides and doors.</p> <p>Size: approx. 200 x 200 mm For side widths up to 20 cm. Packaging: Carton of 25 units</p> <p>650/110, 650/25</p> <p>651/00 Capatect-Diagonalarmierung 651/20 Capatect-Sturzeckwinkel</p>
-------------	---

Application

Consumption	1,1 m ² /m ²
Application	<p>Apply the respective reinforcement material, in the width of the fabric sheet, onto the complete surface of heat insulating boards. Apply in 2/3 of the nominal layer thickness and embed Capatect-Gewebe/Fabric 650 without crinkling by pressing on. Adjacent sheets should overlap each other by approx. 10 cm. Subsequent coat of surfacer should be applied immediately wet-on-wet, to ensure complete embedding of the fabric.</p> <p>The reinforcement layer thickness depend on the respective reinforcement material.</p>

Advice

Disposal	<p>Materials and all related packaging must be disposed of in a safe way in accordance with the full requirements of the local authorities.</p> <p>Particular attention should be made to removing wastage from site in compliance with standard construction site procedures.</p> <p>European Waste Code:</p> <p>Dispose of waste material residues to EWC 101103 (old glass fibre materials) or as per EWC 170904 (mixed construction and demolition waste).</p>
Customer Service Centre	<p>As it is impossible to list herein the wide variety of substrates and their specific problems, please request our technical assistance in case of queries.</p> <p>We will describe appropriate working methods, if a substrate not specified above is to be coated.</p> <p>Tel.: (+49) 0 61 54 / 71 17 10 Fax: (+49) 0 61 54 / 71 17 11 e-mail: kundenservicecenter@caparol.de</p> <p>Please see www.caparol.com</p>